

# MiniPID 2 HS

**OEM Gas Sensor with State-of-the-Art Sensing Technology** 



MiniPID 2 HS is designed to detect VOCs at sub ppb concentrations. Detection at these levels can be compromised by contamination from moisture, dust and aerosols. To overcome this, we have developed a world leading, patent pending, filter to protect the ionisation chamber.


### **Key Features**

- 0.5 ppb sensitivity
- 10,000 hours continuous lamp life
- Anti-contamination Design
- · Humidity Resistant
- Patent pending filter
- Serviceable Electrode Stack and Lamp
- Intrinsically Safe

## **Typical Applications**

- Air quality monitoring
- Semiconductor fabrication
- HVAC
- Clean room
- Fertility labs
- Glove boxes

| Performance             |             |
|-------------------------|-------------|
| Electrode Stack Colour  | Red         |
| Minimum Detection Limit | 0.5 ppb     |
| Range                   | >3 ppm      |
| T90 Response Time (S)   | <12s        |
| Sensitivity             | >600 mV/ppm |

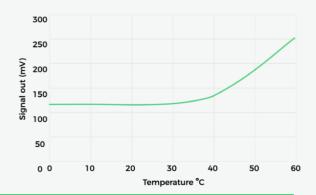

| Power & Signal                                  |   |
|---|---|
| Supply Voltage (using internal regulator)       | 3.6 - 18 V (non intrinsically safe 10 - 18 V) |
| Supply Voltage (using a regulated power supply) | 3 - 3.6 V                                     |
| Current   | 20 - 32 mA (130 for 100 ms at start up)       |
| Power Consumption                               | 100 mW at 3.3 V                               |
| Output Signal (using a regulated power supply)  | 0 to rail voltage - 0.1 V                     |

| Relative Humidity Range |                             |
|-------------------------|-----------------------------|
| Temperature Range       | 0 to 40 °C                  |
| Relative Humidity Range | 0 - 99% RH (non condensing) |


**İ**Sweek

Add: 2301, Desai Technology Building, No. 9789 shennan avenue, nanshan district, shenzhen, Guangdong, China Tel: +86-755-83289069 Fax: +86-755-83289052 E-mail: sales@isweek.com

| Lifetime & Warranty |   |
|---------------------|---|
| Sensor Life         | >5 years                                    |
| Lamp Life           | 10,000 hours                                |
| Warranty            | 10.6 eV lamp and MiniPID 2 Body = 12 months |

| Order Code  | Intrinsically Safe | Supply Voltage |
|-------------|--------------------|----------------|
| MP3SHLHSAU2 | <b>Ø</b>           | 3.0V to 3.2V   |
| MP3SHLHSBU2 | <b>Ø</b>           | 3.2V to 3.6V   |
| MP3SHLHSCU2 | <b>Ø</b>           | 3.6V to 10.0V  |
| MP3SHLHSNU2 | 8                  | 3.6V to 18.0V  |

| Lifetime & Warranty    |   |
|------------------------|---|
| Patents                | US 7.046.012 EC 1474681   |
| Europe                 | ATEX II 1G Ex ia IIC Ga (-40 °C $\leq$ Ta $\leq$ +55 °C) @ 1.1W     |
| Worldwide              | IECEx II 1G Ex ia IIC Ga (-40 °C $\leq$ Ta $\leq$ +55 °C) @ 1.1W    |
| North America          | UL913 (8th) Edition Class I, II, III, Division 1 CSA-C22.2 No157-92 |
| Eurasian Customs Union | № EAЭC RU C-GB.HA65.B.00635/20                                      |

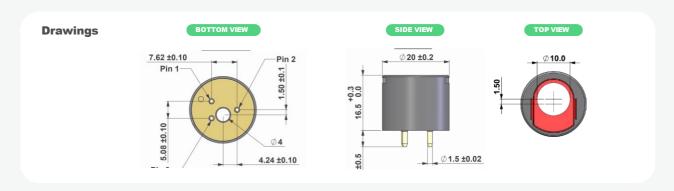

#### **Sensor Development Kit (SDK)**

Sensor Development Kit is used as an efficient way to test and integrate the ION Science photoionisation detection sensors into any application. SDK includes everything needed to run MiniPID 2 including an integration board, sensor board, gas delivery hood and a PC application.



#### Other MiniPID 2 Var

ION Science is a leading manufacturer of VOC gas sensors, our PID sensor technology is trusted by major gas detection manufacturers globally. Other gas sensors from ION Science include:

- MiniPID 2 PPM
- MiniPID 2 PPB
- MiniPID 2 PPM WR
- MiniPID 2 PPB WR
- MiniPID 2 HS
- MiniPID 2 10.0 eV
- MiniPID 2 11.7 eV



**İ**Sweek